


Motion Sensor

DK 7320.570


Note:

For reasons of clarity of the presentation, these operating instructions do not contain all information details and also cannot cover every possible case of installation, operation or repair. Technical specifications are subject to change without notice. In case of doubt, the German text prevails.

Sensor Unit: I/O Unit 7320.210

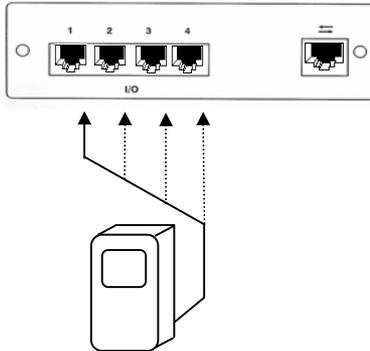

Sensor Unit: Climate Unit 7320.230

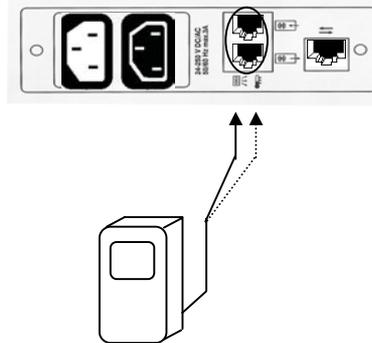


Erfassung:

- 45° left
- 45° right
- 30° down

Mounting high:

1,8m to 2,4m

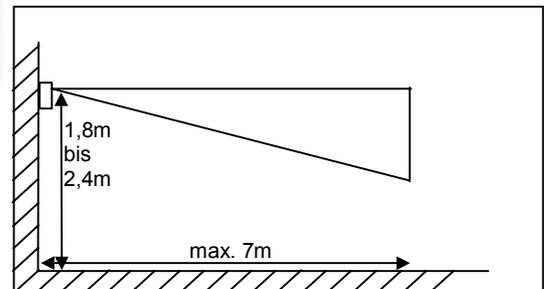

Description:

The sensors can be connected to the I/O Unit 7320.210 (max. 4 sensors) or the Climate Unit 7320.230 (max. 2 sensors). The function of the sensor is to monitor motion. The sensor is a passive infrared motion detector. Animals up to 18 kg body weight do not trip the alarm. The detector needs about 2min to be ready for operation. The sensor is assigned a code by which it is automatically identified and set by the CMC TC system. The sensor can be used if the following components are available:

- Processing unit (7320.100) with mains adapter (e.g., 7320.425), national-standard connecting cable, programming cable.
- Sensor unit (7320.210 or 7320.230), Connecting cable (RJ45, Cat5).

General conditions of use:

- The sensor must only be used together with the Rittal CMC-TC system.
- The operating instructions / safety instructions of the Processing Unit and of the above sensor units apply.
- The maximum cable length between the sensor unit and the sensor is 2m. The connection must be made with the connecting cable of the supply. Extension cables 7200.450 for special applications are available after consultation with our central office.
- It is absolutely necessary that these cables are installed separately from mains power cables.
- The use of the sensors is exclusively limited to the specified ambient conditions.
- It is forbidden to open the sensor enclosures. They do not contain parts requiring maintenance.
- Before making the connection, check to be sure that the sensor can be used with the device / module.
- It is forbidden to render safety equipment ineffective.
- Direct contact of the sensor with water (e.g., dew), oil sludge or any aggressive substances is forbidden.
- Use in locations with flammable gas or vapor is forbidden. Protection from water, dust, etc. must be ensured by installation in a cabinet or rack.
- The CMC-TC system must not be live with voltage when the sensor is being connected to the sensor unit.
- The sensor must be installed properly as described in the separate installation instructions.

Technical data:

Detector type: Infrared (IR) detector
 Connection: RJ12 socket 6-pole
 Connecting cable: length 2m
 Temperature range: +5°C to +45°C
 Protection category: IP 40
 Time to ready: approx. 2 min.

Current consumption: max. 30mA
 Dimensions (detector with base/plinth): D=100mm, H=50 mm
 Alarm time: 2-3 sec.
 integrated LED Off: no motion detected
 integrated LED Red: motion detected

Address: Rittal GmbH & Co. KG / Auf dem Stützelberg / D-35745 Herborn / phone: (+49) (2772) 505 – 0 /
 Fax: (+49) (2772) 505 – 2319 / eMail: Info@rittal.de / Internet: <http://www.rittal.de>

